


3-WAY POWER DIVIDER - 0 DEG

Model: PD05200A3S

ELECTRICAL SPECIFICATIONS:

NO.	DESCRIPTION		SPEC.
01	Frequency Rang		0.5-20GHz
02	Insertion Loss (Excluding theoretical loss 4.8 dB)		2.4dB Max
03	Isolation		17dB Min
04	VSWR		Input 1.50:1
			Output 1.50:1
05	Power	Forward	20 Watt Max.
06	Handling	Reversal	1.0 Watt Max.
07	Unbalance	Phase	±5° Deg Max
		Amplitude	±0.5dB Max.
08	In/Out Impedance		50 Ohms
09	Case Material		Aluminum Alloy
10	Surface Finish		Gray paint
11	Connectors		Stainless Steel
			SMA-Female
12	Impedance		50 ohms
13	Operation temperature		-45C sim+ 85C
14	Storage Temperature		-54C sim+ 105C

MECHANICAL OUTLINE: Units in m"m

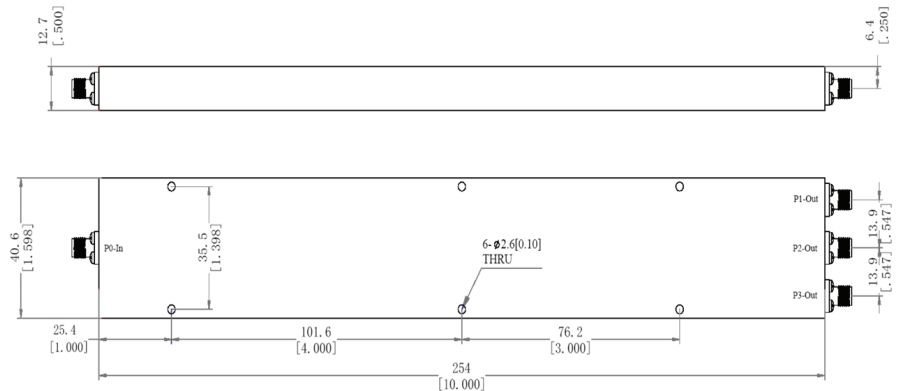

Note:

Dimensions (mm/ [inch]), General tolerance
((plus/minus 0.5) / [plus/minus 0.02])